

Above Ground Domestic Tank



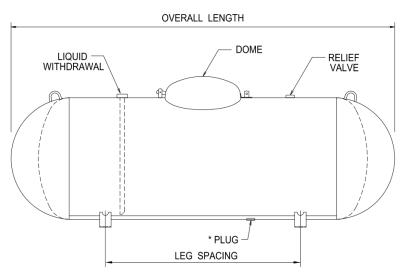


General Specifications

Conforms to the latest edition and addenda of the ASME code for Pressure Vessels, Section VIII, Division 1. Complies with NFPA 58.

Rated at 250 psig from -20° F. to 125° F. All tanks may be evacuated to a full (14.7 psi) vacuum.

Vessel Finish: Coated with TGIC powder.

Liquid withdrawal opening located under the dome on the 120wg vessels ONLY.

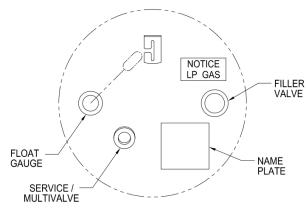

ABOVEGROUND VESSEL DIMENSIONAL INFORMATION									
All vessels dimensions are approximate									
WATER	OUTSIDE	HEAD	OVERALL	OVERALL	LEG	LEG	=	QUANTITY	
CAPACITY	DIAMETER	TYPE	LENGTH	HEIGHT	WIDTH	SPACING	WEIGHT	FULL	PER
								LOAD	STACK
* 120 wg.	24"	Ellip	5' - 5 13/16"	2' - 8 1/4"	10 1/8"	3' - 0"	245 lbs.	96	12
454.2 L	609.6 mm		1671.6 mm	819.2 mm	257.2 mm	914.4 mm	111.1 kg.		
* 250 wg.	31.5"	Hemi	7' - 2 1/2"	3' - 3 3/4"	12 3/4"	3' - 6"	472 lbs.	63	9
946.3 L	800.1 mm		2197.1 mm	1009.7 mm	323.9 mm	1066.8 mm	214.1 kg.		
* 320 wg.	31.5"	Hemi	8' - 11 3/4"	3' - 3 3/4"	12 3/4"	4' - 0 1/4"	588 lbs.	45	9
1211.2 L	800.1 mm		2736.9 mm	1009.7 mm	323.9 mm	1225.6 mm	266.7 kg.		
500 wg.	37.42"	Hemi	9' - 10"	3' - 9 11/16"	15"	5' - 0"	871 lbs.	30	6
1892.5 L	950.5 mm		2997.2 mm	1160.5 mm	381.0 mm	1524.0 mm	395.1 kg		
1000 wg.	40.96"	Hemi	15' - 10 13/16"	4' - 1 3/8"	16 1/4"	9' - 0"	1729 lbs.	15	5
3785.0 L	1040.4 mm		4846.6 mm	1254.1 mm	412.8 mm	2743.2 mm	784.3 kg		
1465 wg.	46.77"	Ellip	17' - 6 7/8"	4' - 4 3/4"	21"	10' - 0"	2745 lbs.	12	4
5545.0 L	1188 mm		5356.2 mm	1339.9 mm	533.4 mm	3048 mm	1245 kg		
2000 wg.	46.77"	Ellip	23' - 9"	4' - 7"	21"	20' - 0"	3676 lbs.	8	4
7570.0 L	1188 mm		7239 mm	1709.7 mm	533.4 mm	6096 mm	1667.5 kg		

* DRAIN PLUG NOT AVAILABLE Eng. Update: April 5, 2013